

# PHOTOVOLTAIC FUSE-LINKS


## gPV FUSE-LINKS FOR PHOTOVOLTAIC APPLICATIONS

10x85	$I_n$ (A)	REFERENCE	BREAKING CAPACITY (kA)	PACKING Uni./BOX
1500V DC	2	492202	10	4/24
	4	492205	10	4/24
	6	492210	10	4/24
	8	492215	10	4/24
	10	492220	10	4/24
	12	492225	10	4/24
	15	492229	10	4/24
	16	492230	10	4/24
1200V DC	20	492235	10	4/24
	25	492240	10	4/24



## TECHNICAL gPV FUSE-LINKS FOR PHOTOVOLTAIC APPLICATIONS DIMENSIONS

10x38  
14x51  
10x85

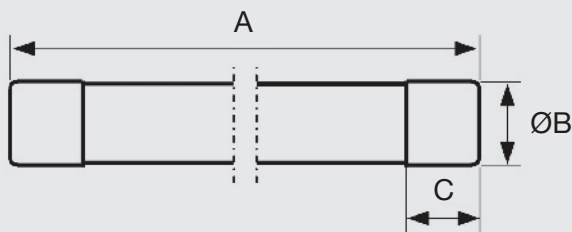

SIZE	A	B	C
10x38	38	10,3	10
14x51	51	14,3	10
10x85	85	10,3	10

STANDARDS  
IEC 60269-1  
IEC 60269-6  
UL 2579

APPROVALS  
Cd-Pb FREE  
RoHS compliant

TECHNICAL  
t-I CHARACTERISTICS  
PAGE 10

TECHNICAL  
AMBIENT TEMPERATURE  
DERATING FACTOR  
PAGE 12

COMPATIBLE  
CLIP CONTACT FOR  $\phi 10$   
FUSE-LINKS  
PAGE 07